


## PRODUCT SPECIFICATIONS

### CAT6 U/UTP Keystone Jack

#### Construction

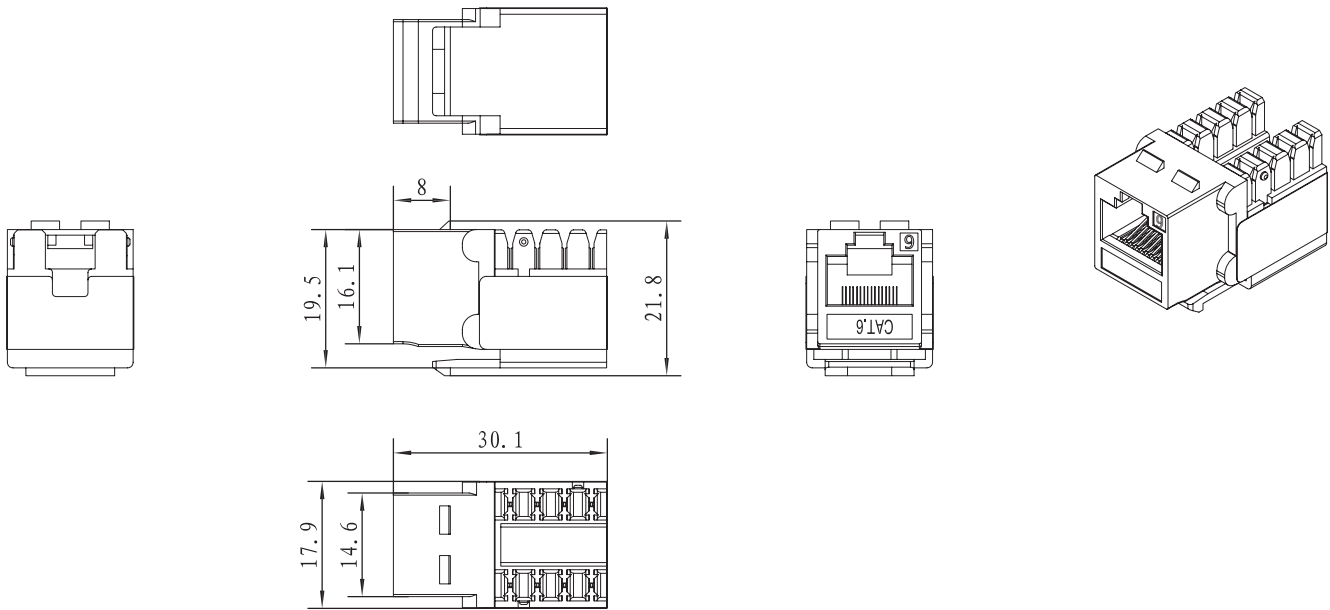

COMPLIANCE & CERTIFICATIONS			
RoHS		ANSI/TIA/EIA 568 C Standard	
SPECIFICATIONS			
MATERIAL		PERFORMANCE	
1. Plastic Housing: PC 3. RJ45 Contact Material & Finished: 2-1. Phosphor Bronze with Nickel Plated 2-2. Contact Area: Gold Plated 3. IDC Housing: PC 4. IDC Terminal Material & Finished: 4-1. Phosphor Bronze with Tin Plated 4-2 110 Tool Compatible 4-3 Suitable for 22-26 AWG Stranded and Solid Wire 5. IDC CAP: PC 6. Others: ABS		a. The Sticker Color Codes Two Wiring of T568A & T568B. b. Insertion Force: 900 gms for 8 Contacts c. Retention Strength: 7.7 kgs Between Jack & Plug d. Operation Temperature: -30° to 60° e. Durability: e-1. Jack: 750 Cycles Plug-Jack Mating and Unmating test, Insertion Cycles at 20 Cycles/Minute Max. Contact Resistance per 100 Cycles. e-2. IDC: Max. 200 Punching Times f. The CAT6 Performance is in Compliance with the ANSI/TIA/EIA 568 C Standard	
PART NUMBER	AVAILABLE COLOR	PART NUMBER	AVAILABLE COLOR
MKJ6U-03720	Black	MKJ6U-02418	Light Almond
MKJ6U-02415	Blue	MKJ6U-02419	Orange
MKJ6U-02416	Green	MKJ6U-02420	White
MKJ6U-02417	Ivory	MKJ6U-02421	Yellow

NOTE: TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE