
Accelair 2 Configuration for Cable Blowing

Fiber Buckle Plates includes 5 Buckle Shuttles

P/N	Description
89482	.8 - 0.9mm
89483	1.0mm
89484	1.1mm
89485	1.2mm
89486	1.3mm
89487	1.4mm
89488	1.5mm





Fiber Buckle Plates for EPFU includes 5 Buckle Shuttles

P/N	Description
89440	1.0mm
89441	1.2mm
89442	1.4mm
89443	1.5mm

Plates are made from stainless steel to withstand the abrasive coatings of the EPFU fibers. These plates are not included in the standard configuration package and must be purchased separately.

Fiber Blowing Plates

P/N	Description	P/N	Description
89461	1.4mm	89470	2.3mm
89462	1.5mm	89471	2.4mm
89463	1.6mm	89472	2.5mm
89464	1.7mm	89473	2.6mm
89465	1.8mm	89474	2.7mm
89466	1.9mm	89475	2.8mm
89467	2.0mm	89476	2.9mm
89468	2.1mm	89477	3.0mm
89469	2 2mm		



Fiber Blowing

Tube Clamps and Seals includes 5 Tube Seals

P/N	Description
89491	3mm
89492	4mm
89493	5mm
89494	6mm
89495	7mm
89496	8mm
89497	8.5mm
89498	10mm



Tube Clamp and Seals

Spare Tube Seals 5/pk

P/N	Description	
89936	3mm	
89937	4mm	
89938	5mm	
89939	6mm	
89940	7mm	
89941	8mm	
89942	8.5mm	
89953	10mm	

Infeed Guides

P/N	Description
89478	.8 - 2.0mm
89479	2 0 - 3 0mm



Spare 7	Tires 10/pk
P/N	Description


P/N Description 89503 Up to 2.0mm 89508 2.0 - 3.0mm




Accelair 2 Accessories and Spares

P/N 89438 Battery Pack and Vehicle Adapter Kit

P/N 89439 Spare Battery

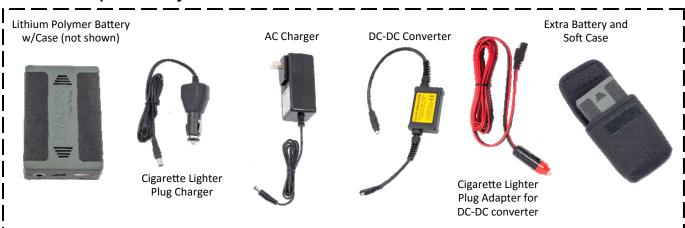

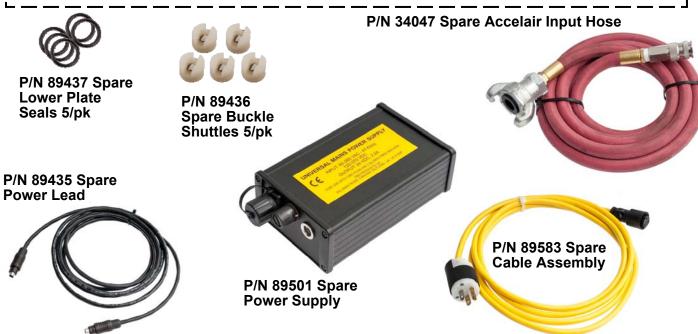

Accelair 2 Bottled Nitrogen Kit for Blown Fiber

Used with bottled nitrogen in place of a compressor for 5mm or smaller Microduct

- Quickly connects to the Accelair 2 via a quick coupling.
- Hose is 10 feet long for easy setups.
- The regulator has easy to read 2" gauges.
- The flexible hose is abrasion, weather and ozone resistant.
- Inlet connection is CGA 580.



Do Not Exceed the Hose Rating of 200 PSI.

Accelair 2 Bottled Nitrogen Kit P/N 74080 Weight: 5 lbs. (2.3 kgs)